


HOOK-BLOCK KR-40 МК 060.15.00.000-10, I/c-40 t

Hook-block is used in the block-and-tackle system of drill service trucks for round trip operations in well repair and stimulation. The hook-block is designed for hanging links, elevators and other tools.

Specifications

Load capacity, t	40
Sheave diameter of trough bottom, mm	580
Rope diameter, mm	22...23.5
Sheaves pin diameter, mm	90
Mouth diameter of hook center arm, mm	90
Side link support mouth diameter, mm	55
Overall dimensions	
Length, mm	1796
Width, mm	692
Height, mm	466
Mass, kg	572

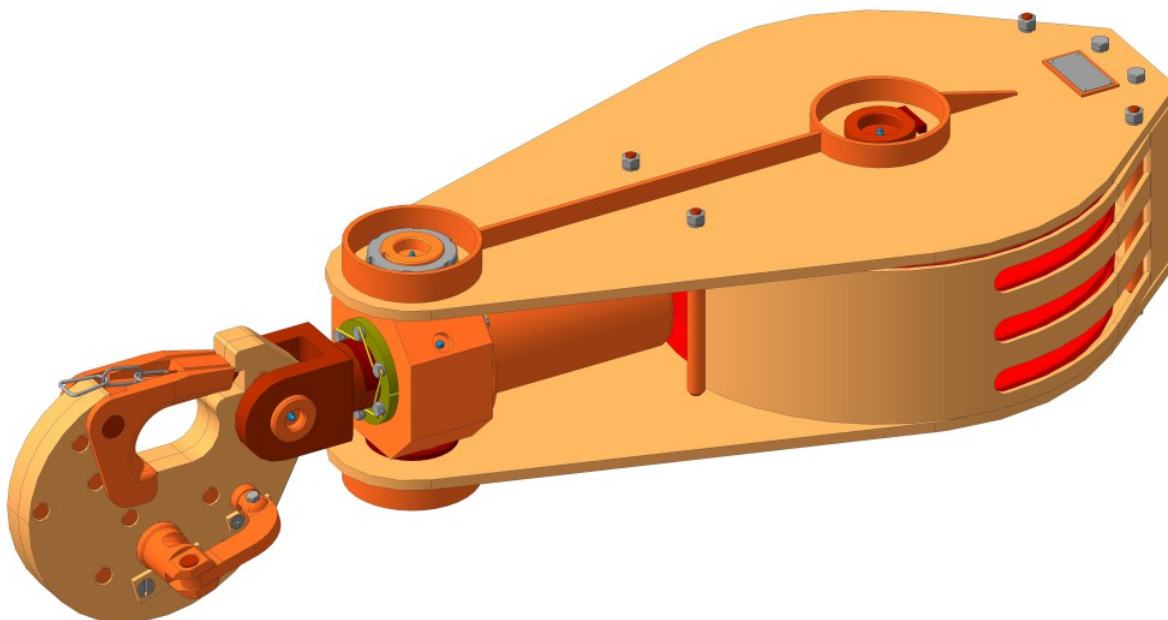

Manufacturer: NKMZ-ST Ltd.
19, Magistralnaya st., Neftekamsk
Republic of Bashkortostan
Russian Federation 452683
Tel: +7(34783)2-02-02, 2-00-13.
www.nkmzst.ru, st@nkmz.ru